

FRAME FIXING

Screw pre-assembled in plug to speed up installation.




Hammer pre-assembled plug and screw through fixture, tighten by screwing.

Light duty through fixing for use in solid brickwork, blockwork, hard stone and concrete.

Ideal for door and window frames, wooden battens, fence posts, racking and shelving.

Size do x L	Code	Price Per 100	Tfix	L	do	h1	hnom	Box qty	Outer
Ø 8x60	FFZ08060	£29.48	15	60	8	55	45	100	800
Ø 8x80	FFZ08080	£35.56	35	80	8	55	45	100	800
Ø 8x100	FFZ08100	£37.42	55	100	8	55	45	100	800
Ø 8x120	FFZ08120	£49.90	75	120	8	55	45	100	400
Ø 10x80	FFZ10080	£51.03	30	80	10	60	50	50	400
Ø 10x100	FFZ10100	£54.43	50	100	10	60	50	50	400
Ø 10x115	FFZ10115	£64.08	70	115	10	60	50	50	400
Ø 10x135	FFZ10135	£74.84	90	140	10	60	50	50	400
Ø 10x160	FFZ08120	£96.39	110	160	10	60	50	50	400

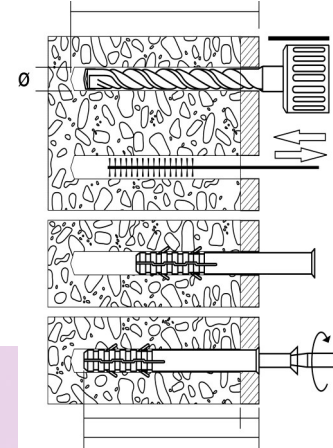

Tfix Thickness of fixture (mm)
 L Anchor body length (mm)
 do Drill hole diameter (mm)
 h1 Depth of drilled hole deep point (mm)
 hnom Anchor Embedment depth (mm)

TECHINCAL DATA

Tensile Loads Nrec - kN		
Diameter	Concrete (C20/25)	Full Brick
8.0mm	0.4	0.32
10.0mm	0.55	0.38

Shear Loads Vrec - kN		
Diameter	Concrete (C20/25)	Full Brick
8.0mm	0.8	0.8
10.0mm	1.4	1.4

All dimensions in mm, unless otherwise stated.