

HAMMER FIXINGS




Light weight through **fixing** for use in solid brickwork, blockwork, hard stone and concrete.
 Ideal for high repetition jobs where speed of installation is important, wooden battens,
 door and window frames, skirting boards, brickwork ties, trunking, signs and plumbing fittings.

HAMMER FIXING A2

Pre-assembled countersunk nylon plug with A2 stainless steel nail screw

Size do x L	Code	Price Per 100	Tfix	L	do	h1	hnom	Box qty
Ø 6x40	HFX06040	£38.90	5	30	5	30	25	200
Ø 6x60	HFX06060	£59.86	25	50	5	30	25	100
Ø 8x80	HFX08080	£118.28	10	40	6	40	30	100
Ø 8x100	HFX08100	£132.24	30	60	6	40	30	50

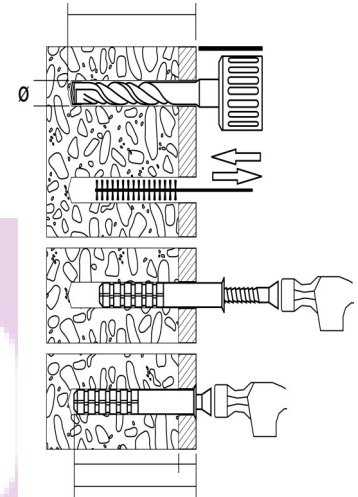

TECHINCAL DATA

Recommended Tensile Load

Nylon Hammer Fixings

Diameter	Concrete	Full Brick
5.0mm	0.16	0.1
6.0mm	0.18	0.14
8.0mm	0.22	0.18

All dimensions in mm, unless otherwise stated.

- L Anchor Body Length (mm)
- do Drill hole diameter (mm)
- hnom Anchor Embedment depth (mm)
- Tfix Thickness of fixture (mm)
- h1 Depth of drilled hole to deepest (mm)