

# HAMMER FIXINGS




Light weight through **fixing** for use in solid brickwork, blockwork, hard stone and concrete.  
Ideal for high repetition jobs where speed of installation is important, wooden battens,  
door and window frames, skirting boards, brickwork ties, trunking, signs and plumbing fittings.

## HAMMER FIXINGS Y-passivated

Pre-assembled countersunk nylon plug with yellow passivated nail screw

Size do x L	Code	Price Per 100	Tfix	L	do	h1	hnom	Box qty	Outer
Ø 5x30	HFZ05030	£8.21	5	30	5	30	25	200	3200
Ø 5x50	HFZ05050	£11.19	25	50	5	30	25	200	3200
Ø 6x40	HFZ06040	£10.20	10	40	6	40	30	200	3200
Ø 6x60	HFZ06060	£13.85	30	60	6	40	30	100	1600
Ø 6x80	HFZ06080	£18.51	50	80	6	40	30	100	1600
Ø 8x60	HFZ08060	£22.05	20	60	8	50	40	100	800
Ø 8x80	HFZ08080	£29.04	40	80	8	50	40	100	800
Ø 8x100	HFZ08100	£35.14	60	100	8	50	40	100	800
Ø 8x120	HFZ08120	£43.68	80	120	8	50	40	100	800

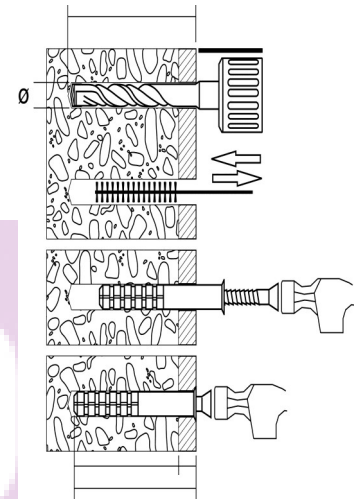

## LARGE HEAD HAMMER FIXING — BZP

Size do x L	Code	Price Per 100	Tfix	L	do	h1	hnom	Box qty
Ø 6x40	HFLZ06040	£10.53	15	40	6	30	25	100
Ø 6x60	HFLZ06060	£14.07	35	60	6	30	25	100
Ø 6x80	HFLZ06080	£18.85	40	80	6	30	25	100

L Anchor Body Length (mm)  
do Drill hole diameter (mm)  
hnom Anchor Embedment depth (mm)  
Tfix Thickness of fixture (mm)  
h1 Depth of drilled hole to deepest (mm)

## TECHINCAL DATA

### Recommended Tensile Load

Nylon Hammer Fixings

Diameter	Concrete	Full Brick
5.0mm	0.16	0.1
6.0mm	0.18	0.14
8.0mm	0.22	0.18

All dimensions in mm, unless otherwise stated.